



SVORKOVNICE

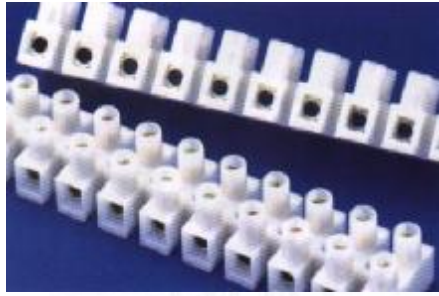

Plast: polyamid 66 se samozhášecí přísadou
 Pracovní teplota: -30°C - 110°C
 Tělo: poniklovaná mosazná slitina
 Šroub: pozinkovaná ocel

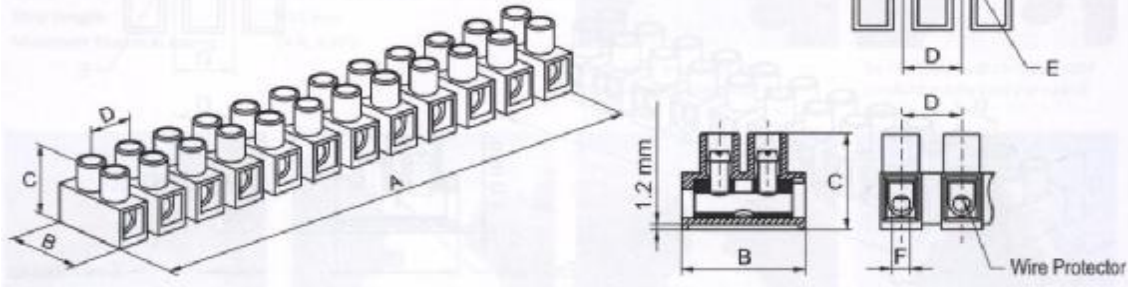

KATALOG Č.	Ø	ŠROUB	A	B	C	D	E	F
17172.5	2,5 mm ²	M2,6x5	96,20	17,00	14,50	8,00	2,90	2,8
171704	4 mm ²	M3,0x6	117,5	20,20	17,00	10,00	3,60	3,4
171706	6 mm ²	M3,5x7	140,7	23,80	19,00	12,00	3,90	4,2
171710	10 mm ²	M4,0x9	158,0	25,60	25,20	13,50	4,40	5,0
171716	16 mm ²	M4,0x9	169,8	28,00	23,00	14,00	4,20	6,0
171725	25 mm ²	M5,0x11	194,4	36,90	28,70	16,50	4,20	7,0

Part Nr.	U.S.A. UL	Canada CSA	Germany VDE	Finland FI	Sweden S	Denmark D	Norway N	Belgium CENELEC	Netherlands KEUR	Austria OVE	Switzerland S	Italy CEC	China CCC
17172.5	600 V 20 A 22 - 12 AWG	600 V 20 A 22 - 12 AWG	450 V 17,5 A 1,5 mm ²	450 V 17,5 A 1,5 mm ²	450 V 17,5 A 1,5 mm ²	450 V 17,5 A 1,5 mm ²	450 V 17,5 A 1,5 mm ²	450 V 17,5 A 1,5 mm ²	450 V 17,5 A 1,5 mm ²	450 V 17,5 A 1,5 mm ²	450 V 17,5 A 1,5 mm ²	450 V 17,5 A 1,5 mm ²	400 V 17,5 A 1,5 mm ²
171704	600 V 30 A 22 - 10 AWG	600 V 30 A 22 - 10 AWG	450 V 24 A 2,5 mm ²	450 V 24 A 2,5 mm ²	450 V 24 A 2,5 mm ²	450 V 24 A 2,5 mm ²	450 V 24 A 2,5 mm ²	450 V 24 A 2,5 mm ²	450 V 24 A 2,5 mm ²	450 V 24 A 2,5 mm ²	450 V 24 A 2,5 mm ²	450 V 24 A 2,5 mm ²	400 V 24 A 2,5 mm ²

Part Nr.	U.S.A. UL US	Germany VDE	Finland FI	Sweden S	China CCC
171706	600 V 35 A 22 - 10 AWG	500 V 41 A 6 mm ²	500 V 41 A 6 mm ²	500 V 41 A 6 mm ²	500 V 41 A 6 mm ²
171710	600 V 50 A 22 - 8 AWG	500 V 57 A 10 mm ²	500 V 57 A 10 mm ²	500 V 57 A 10 mm ²	500 V 57 A 10 mm ²

Part Nr.	U.S.A. UL US	Germany VDE	Finland FI
171716	600 V 65 A 14 - 6 AWG	500 V 76 A 16 mm ²	500 V 76 A 16 mm ²
171725	600 V 85 A 12 - 4 AWG	500 V 101 A 25 mm ²	500 V 101 A 25 mm ²